


Product Features



1. Three programmable throttle speed settings to support quick throttle response.
2. Include soft start and governor mode.
3. Small and compact PCB design for lightweight and simple installation.
4. Large heat sink for optimum thermal performance.
5. Highly compatible to work with 98% of all brushless motors currently on the market.
6. Ultra-smooth motor start designed to run with all kinds of brushless motors.
7. The power inlet utilizes a Japanese made "Low ESR" capacitor in order to provide stable power source.
8. The throttle has more than 200 step resolution that provides great throttle response and control.

Specification

Model	Continuous Current	Peak Current	Dimension	Weight
RCE-BL75G	75A	100A	72 x 28 x 11	53.7 g

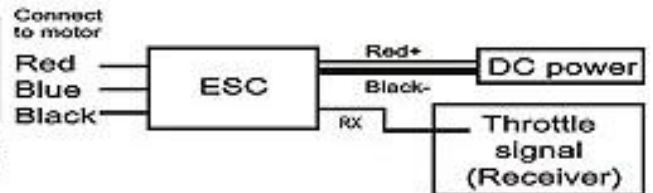

1. Good temperature situation for working at the maximum current
2. Supporting motor types: 2 ~ 10 pole in/outrunner motors.
3. Supporting maximum RPM: 2 pole → 190,000 rpm ; 6 pole → 630,000 rpm.
4. Input voltage: 5.5V ~ 25.2V(Lithium 2~6cells/Ni-Mh 6~18cells)

Note : 1. When setting to Quick throttle response speed, the accelerative peak current will increase.

2. Not including BEC output. User need to provide the power for receiver and servo.

Feature options

Brake Option - 3 settings that include Brake disabled/Soft brake/Hard brake.

Electronic Timing Option - 3 settings that include Low timing/Mid timing/High timing.

Generally, 2 pole motors are recommended to use low timing, while 6 or more poles should use Mid timing. High timing gives more power at the expense of efficiency. Always check the current draw after changing the timing in order to prevent overloading of battery.

Battery Protection Option - 3 settings that include Li-Ion, Li-poly High/Middle/Low voltage protection

The default setting is Low voltage protection (suitable for high discharge current). CPU will automatically determine cell number of input Lithium battery (7.4~25.2V). This option will prevent over-discharge of the battery. The following reference is the guideline for setting the Battery Protection option.

3-1 Li-Ion/Li-poly High voltage protection-When the voltage of single cell drops to 3.2V, the first step of battery protection mode will be engaged by the ESC resulting in reduced power. The pilot should reduce the throttle and prepare landing. If the voltage of single cell drops to 2.9V, the second step of battery protection mode will be engaged resulting in power cutoff. (*Note 1)

For 11.1V/3cells Lithium battery, the full charged voltage will be approximately 12.6V. According to this input voltage, CPU will determine that this is a 3cell battery.

First step protection: $3.2V \times 3cell = 9.6V$

Second step protection: $2.9V \times 3cell = 8.7V$

When the voltage drops to 9.6V, the power will be reduced. When the voltage drops to 8.7V, the power will be cut off.

3-2 Li-Ion/Li-poly Middle voltage protection- This option is same as instruction 3-1, but when the voltage of single cell drops to 2.9V, the first step of battery protection will be engaged. When the voltage of single cell drops to 2.6V, the second step of battery protection will be engaged. (*Note 1)

3-3 Li-Ion/Li-poly Low voltage protection- This option is same as instruction 3-1, but when the voltage of single cell drops to 2.6V, the first step of battery protection will be engaged. When the voltage of single cell drops to 2.3V, the second step of battery protection will be engaged. (*Note 1)

Note 1: Second step of battery protection only works when Aircraft mode is setting to the option 4-1.

NOTE: THIS OPTION IS ONLY SUITABLE FOR A FULLY CHARGED BATTERY PACK IN GOOD WORKING CONDITION.

Aircraft Option: 3 settings that include Normal Airplane / Helicopter 1 / Helicopter 2.

Normal Airplane Mode is used for general airplanes and gliders. When flying Helicopters, you can choose Helicopter 1 Mode, or Helicopter 2 Mode. Helicopter 1 Mode provides Soft Start feature. Helicopter 2 Mode provides Soft Start and Governor Mode.

Throttle response speed: 3 settings that include standard/ Medium/ Quick throttle response speed.

The default setting is standard. Use this option to adjust the setting according to flight character. For example, setting at Medium or Quick speed for 3D and powerful flight to make the power response more quickly, but note the accelerative peak current and power expense will increase.

Thermal Protection: When the ESC temperature reaches 80°C for any reason, it will engage the battery protection circuit, reducing power to the ESC. We recommend mounting the ESC in a location with adequate air flow and ventilation.

Safe Power On Alarm: When the operator turns on the ESC, it will automatically detect the transmitter signal.

The ESC will emit a confirmation tone and enter normal operation mode if the throttle is set to the lowest position.

If the throttle position is at full throttle, it will begin to enter Setup Mode. If the throttle is in any other position, the ESC will emit an alarm and not enter into user mode for safety precautions.

Aircraft Locator: If the aircraft should land or crash in an unexpected location and become lost, the pilot can enable the Aircraft Locator Option. The Aircraft Locator Option is engaged by turning off the transmitter. When the ESC does not receive a signal from the transmitter for 30 seconds, it will start to send an alarm to the motor. The sound of the alarm will aid the pilot to locate the aircraft.

This option will not work with a PCM receiver that has SAVE function enabled, or with low noise resistant PPM receivers.

Setup Mode

Setup mode: Make sure to connect the ESC BEC connector to the throttle channel of the receiver. Please refer to the user manual of your radio system. The second step is to connect the 3 power-out signal pins to the brushless motor. Before you turn on the transmitter, please adjust the throttle stick to the maximum full throttle position. Proceed to connect the battery to the ESC.

You will hear confirmation sounds as soon as you enter the SETUP MODE. Please refer the attached flow chart for details.

Throttle stick positions in Setup mode: Setup mode includes five settings: Brake, Electronic Timing, Battery Protection, Aircraft, and Throttle Response Speed. Every setting has three options. Simply place the throttle stick in the highest, middle, and lowest positions for each setting. For example, first brake setting (Hard): move the stick to the highest position. Then timing setting (mid): move the throttle stick in the middle position.

Mode	Throttle position	Low	Middle	High
Brake		• Brake disabled(1-1)	Soft brake(1-2)	Hard brake(1-3)
Electronic Timing		Low-timing(2-1)	• Mid-timing(2-2)	High-timing(2-3)
Battery Protection		High voltage protection(3-1)	• Middle voltage protection(3-2)	Low voltage protection(3-3)
Aircraft		Normal Airplane/Glider(4-1)	• Helicopter 1 (Soft Start)(4-2)	Helicopter 2 (Soft Start+ Governor Mode)(4-3)
Throttle response speed		Standard(5-1)	Medium speed(5-2)	• Quick speed(5-3)

Note: "•" default setting

User Mode

- Ensure the throttle stick to the lowest position.
- Switch on transmitter.



1

Connect battery power to ESC

- ♪♪♪ Power on sound
- ♪♪♪ Transmitter detected sound

2

Setting Status Beeps

- First mode sound (Brake)
- Second mode sound (Timing)
- Third mode sound (Battery protection)
- Fourth mode sound (Aircraft)
- Fifth mode sound (Throttle response speed)

3

Setup Instruction

First mode sound Brake Status

- ♪ = Brake disabled
- ♪♪ = Soft brake
- ♪♪♪ = Hard brake

Second mode sound Electronic Timing Status

- ♪ Low timing (apply to 2 pole Inrunner motors)
- ♪♪ Mid timing (apply to 5 pole In/Out runner motors)
- ♪♪♪ High timing (apply to high power output)
High-timing/big powerpower expense

Third mode sound Battery protection Status

- ♪ = High voltage protection
- ♪♪ = Middle voltage protection
- ♪♪♪ = Low voltage protection

Fourth mode sound Aircraft Status

- ♪ = Normal airplane/Glider
- ♪♪ = Helicopter 1 (Soft start)
- ♪♪♪ = Helicopter 2 (Soft start + Governor Mode)

Fifth mode sound Throttle response speed status

- ♪ = Standard
- ♪♪ = Medium speed
- ♪♪♪ = Quick speed

Instructions on Aircraft Mode Settings

Normal Airplane/Glider Mode (Option 4-1):

This option is applied to general airplanes and gliders.

Helicopter 1 Mode (Option 4-2):

This option provides a soft start feature and is applied to Helicopters for Normal, Idle Up 1, or Idle Up 2 modes. Please note that the sensitivity of the gyro should be set lower when flying in Idle Up 1 or Idle Up 2 modes if tail hunting (wag) occurs due to higher rotor speed.

Helicopter 2 Mode (Option 4-3):

This option supports soft start as well as Governor Mode features and is applied to Helicopters for Idle Up 1 and Idle Up 2 modes(not suitable for Normal Flight Mode). When Governor Mode is in use, the throttle should be set between 75% and 85%. Again if tail wag occurs, lower the sensitivity of the gyro to eliminate the hunting effect. The Governor Mode may not work properly in cases of insufficient rotor speed (due to improper gear ratio), poor battery discharge capability, and improper setting of gyro sensitivity and the blade pitch, etc. Please make sure all the proper adjustments have been done when using Governor Mode.

Setup Mode Minimum 4 channel radio is required

- Place the throttle stick to the highest position.
- Switch on transmitter.



1

Connect battery to ESC

- ♪♪♪ Power on sound
- ♪♪♪ Enter Setup Mode

2

Throttle channel adjustment process, the highest position acknowledge sound.

3

Place the throttle stick to the lowest position, the lowest position acknowledge sound.


4

Use throttle stick to set preferred Brake Mode within the 5 tones. A confirmation sound will kick in when finish.




5

Use throttle stick to set preferred Timing Mode within the 5 tones. A confirmation sound will kick in when finish.




6

Use throttle stick to set preferred Battery Protection Mode within the 5 tones. A confirmation sound will kick in when finish.




7

Use throttle stick to set preferred Aircraft Mode within the 5 tones. A confirmation sound will kick in when finish.



8

Use throttle stick to set preferred Throttle Response Speed Mode within the 5 tones. A confirmation sound will kick in when finish.



9

After setup is completed, place the stick to the lowest position, and then take off the battery and plug it on to enter user mode(or wait until the User mode beeps finish). The ESC is ready for use.